



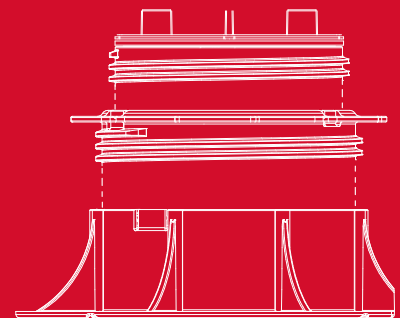

An innovative NEW pedestal that covers more ranges than any other adjustable pedestals in the industry. Suitable for use with all paver types. The Prime Pedestal incorporates the features of the NM and SE pedestals combined. It utilizes the self leveling head, tall range, and high weight capacity to create the one-of-a-kind industry changing pedestal.

Specifications

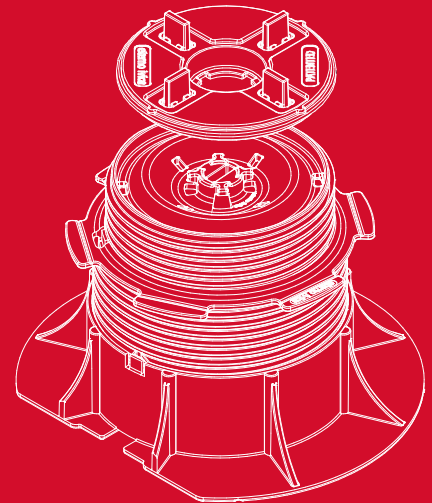

FEATURES

- Various Heights from 1.20" - 16" with Only Three Products
- A Single Product with All the Integrated Elements
- Reduction of Warehouse Space
- Patented Base with "Slots" for Fast "Clip" Attachment
- A Single Cut of the Base to Make the Corner
- Insertion "Head Block" to Achieve a Single Self-Leveling or Fixed Product
- No Additional Rings, Tubes or Extensions Needed
- Compatible with all Accessories
- Transport Costs Considerably Reduced as the Product is Already Assembled



DIMENSIONS

Base Diameter	8"
Head Diameter	6"
PR Prime 0	.6"-1.2"
PR Prime 1	1.20"-2.55"
PR Prime 2	2.55"-6.10"
PR Prime 3	6.10"-16"
Load Capacity	2,205 lbs.



3310 N. Benzing Road
Orchard Park, NY 14127

800.828.8424
www.mrpsupports.com

PR PRIME PEDESTALS Specifications



Pedestals



PR PRIME 0

PRO	UNIT	VALUE	TOLERANCE
MIN HEIGHT	mm	15	+/- 1,0
MAX HEIGHT	mm	30	+/- 1,5
WEIGHT	kg	0.263	+/- 5 %

*The code refers to BASE + SCREW + INTEGRATED EXTENSION.



PR PRIME 1

PR1	UNIT	VALUE	TOLERANCE
MIN HEIGHT	mm	30	+/- 1,0
MAX HEIGHT	mm	65	+/- 1,5
WEIGHT	kg	0.263	+/- 5 %

*The code refers to BASE + SCREW + INTEGRATED EXTENSION.



PR PRIME 2

PR2	UNIT	VALUE	TOLERANCE
MIN HEIGHT	mm	65	+/- 1,0
MAX HEIGHT	mm	155	+/- 1,5
WEIGHT	kg	0.465	+/- 5 %

*The code refers to BASE + SCREW + INTEGRATED EXTENSION.



PR PRIME 3

PR3	UNIT	VALUE	TOLERANCE
MIN HEIGHT	mm	155	+/- 1,0
MAX HEIGHT	mm	420	+/- 1,5
WEIGHT	kg	0.920	+/- 5 %

*The code refers to BASE + SCREW + INTEGRATED EXTENSION.



EXTENSION

HEIGHT	SIZE	PIECES PER BOX
PR3 + 1 PPR EXTENSION	315-595 mm	12 PR3 + 12 PPR
PR3 + 2 PPR EXTENSION	415-770 mm	12 PR3 + 2 X 12 PPR
PR3 + 3 PPR EXTENSION	520-945 mm	12 PR3 + 3 X 12 PPR



HEADS

HEAD	DESCRIPTION
	Two-Component Self-Leveling Head
	Self-Leveling Two-Component XL Head*
	Self-Leveling Head for Decking
	Two-Component Self-Leveling Head for Aluminum Joist
	Two-Component Self-Leveling Cross Head for Aluminum Joist

*With XL head, height of all the PR range increases of 4 mm.



INSTALLATION

The product is laid dry, without the need for adhesives or other types of fixings.



800.828.8424
www.mrpsupports.com